


EMBOSSED CLADDING SYSTEM Installation guide

Robust, attractive, versatile cladding to enhance and refresh any home

Double Shiplap Cladding Installation guide

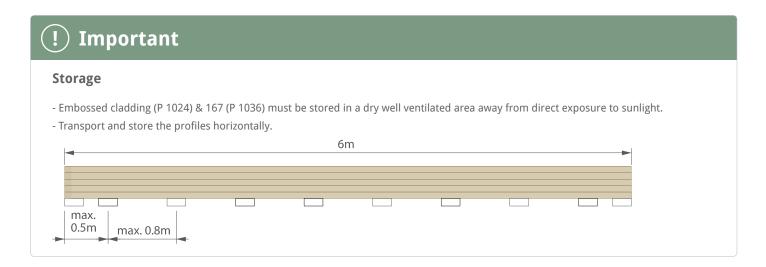

Precautions


- Embossed cladding 300mm (P 1024) & 167 (P 1036) is not a structural product.
- Installing the cladding in temperatures below 0°C or above 30°C is not recommended.
- Do not install the cladding near a heat source.
- The protective tape should be removed immediately after installation.


Maintenance

(


- Cleaning PVC profiles is extremely easy; simply use a soft damp sponge and household cleaning detergent. Avoid the use of abrasive materials and ammonia or chlorine based cleaning agents such as bleach.
- Never use corrosive substances; solvents such as benzene, acetone, turpentine, kerosene or white spirit for example are not permitted.
- Never attempt to clean the profile without water or some form of moisture as this may scratch the surface of the PVC.
- Never paint the PVC profiles.

Recommended safety equipment and tools		
Recommended safety equipment		
Tools	Do	

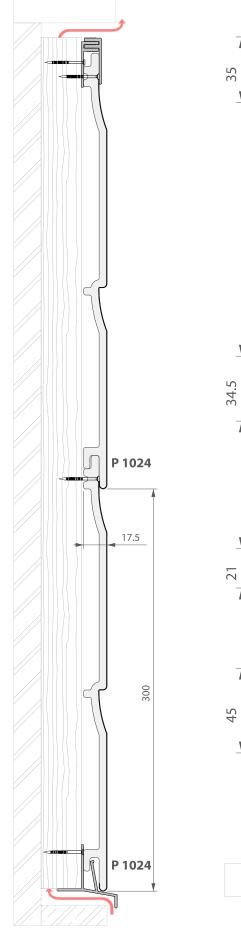

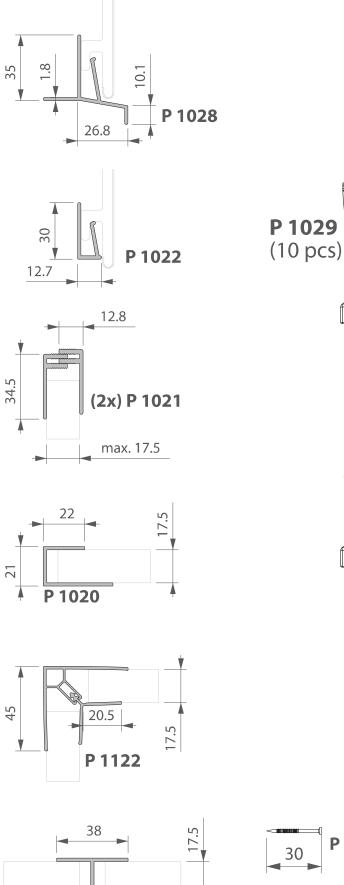


P 1013







Double Shiplap Cladding Installation guide

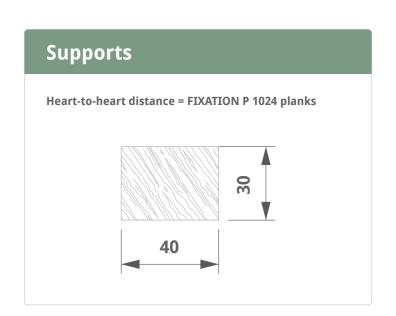

	#m²	kg/m²
P 1024	3.33	4.63
P 1029	± 1.11	
P 1096	± 6 (white)	
Ø 3.5 x 30	± 12 (colours)	

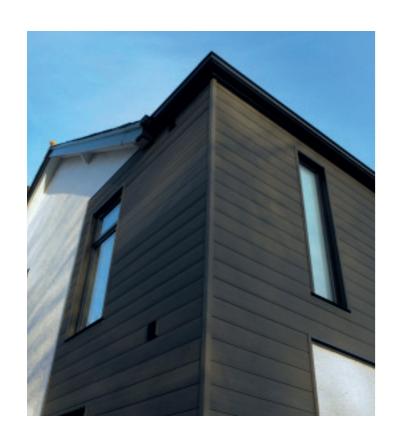


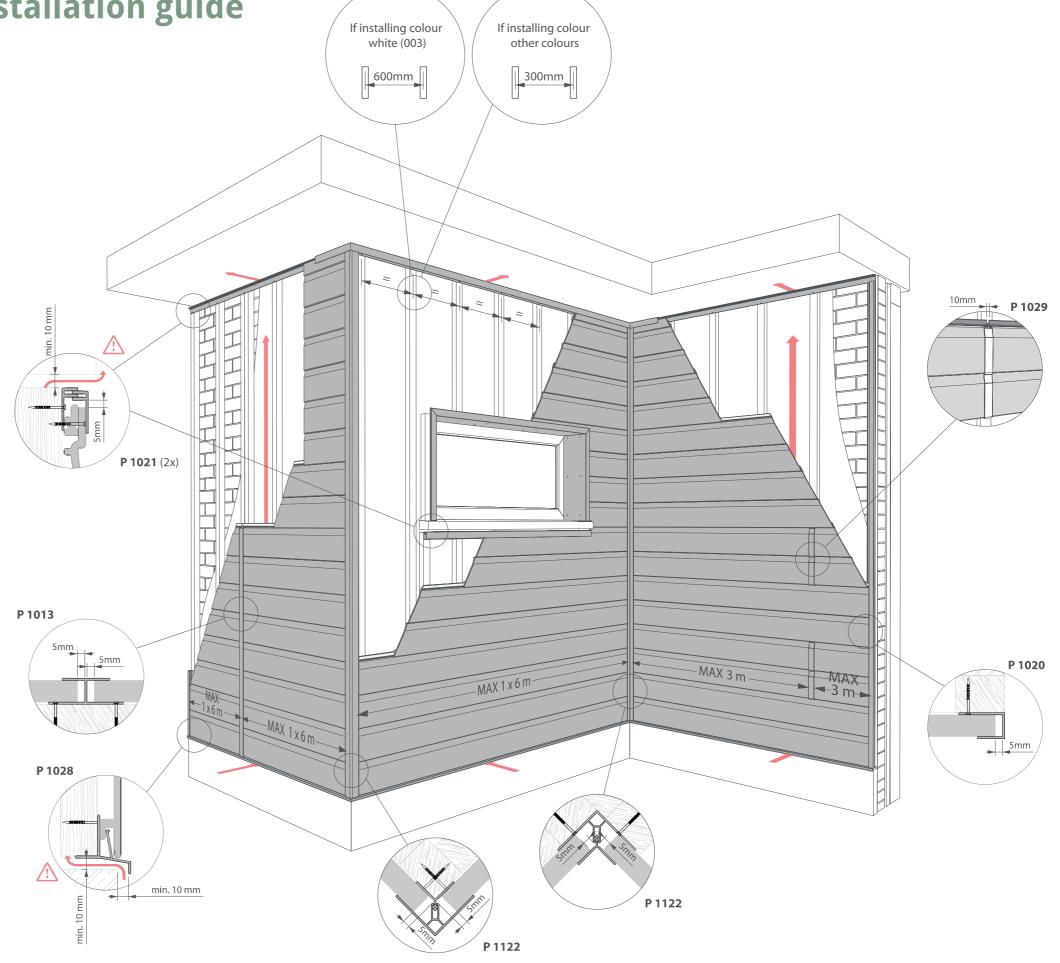




118537_Embossed_Cladding_Installation_Guide_8pp.indd 4-5

Embossed Feather Edge Cladding Installation guide

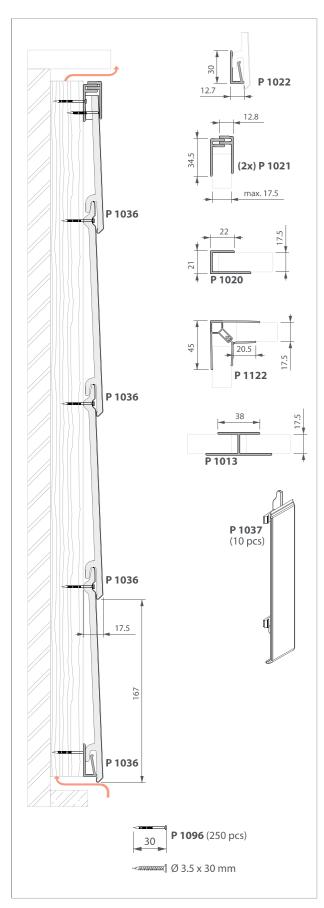

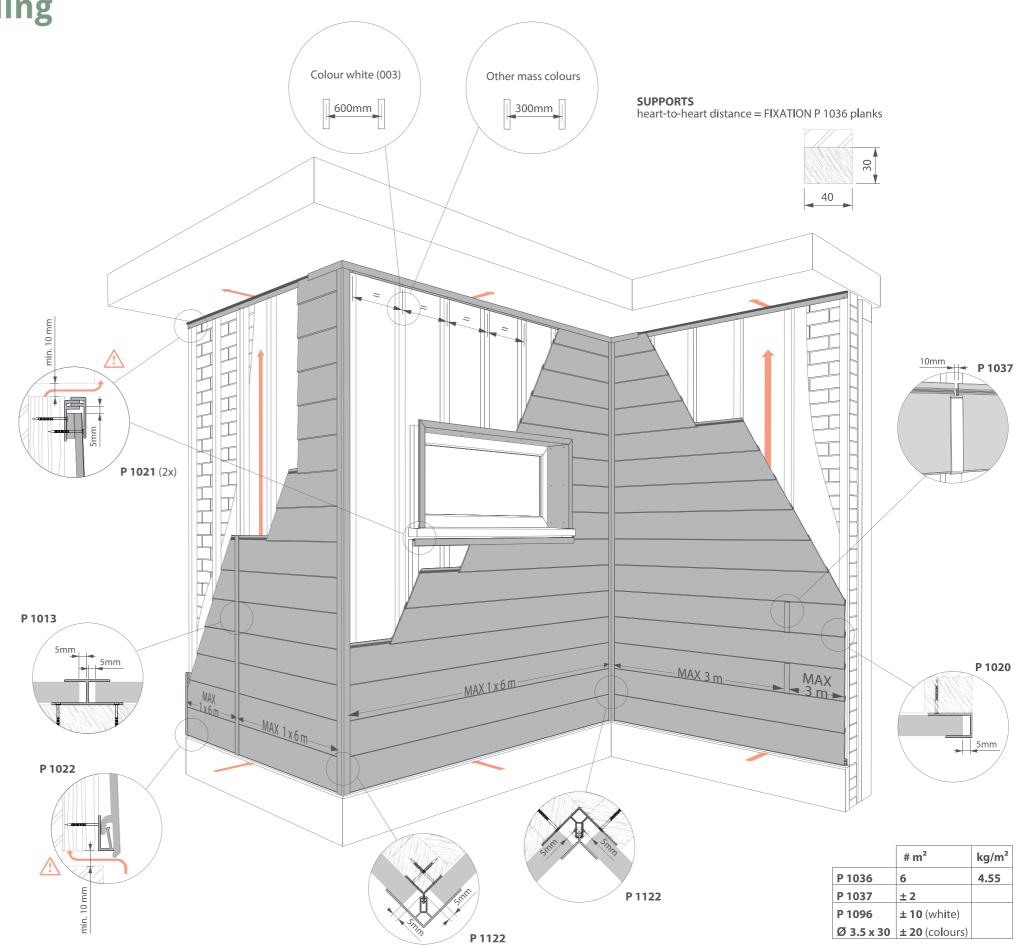




8537_Embossed_Cladding_Installation_Guide_8pp.indd 6-7



We also offer...

















100% Lead Free
Calcium Organic

Document contains proprietary and confidential information, do not copy or disclose this information without the express written consent of Deeplas. Deeplas reserves the right to change this drawing and any associated documents.

