



Mono



Powerguard Insurance Global Coverage

The power output shall not be less than 96.5% of the minimum power output stated in the product data sheet in the first year of the product's life cycle. The loss of power output shall not exceed 0.7% per year thereafter, ending with 80.7% in the 25th year.

■ CSUN ■ Standard Warranty

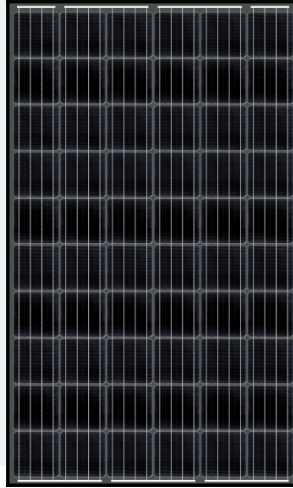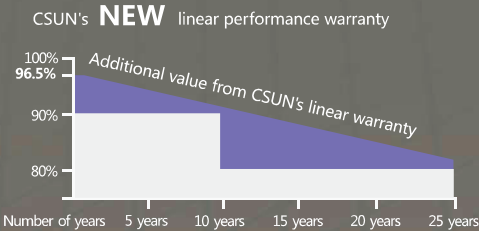

CSUN275-60M-BB

The Solar Roof Project Solution

CSUN275-60M-BB
CSUN265-60M-BB

CSUN270-60M-BB
CSUN260-60M-BB

16.93%
Module efficiency

275 W
Highest power output

10 years
Material & Workmanship warranty

25 years
Linear power output warranty



PID-free



Black back-sheet and frame design, anti-glare, building integration



Tighter product performance distribution and current sorting reduces the mismatch power loss in system operation



Positive tolerance offer



Good temperature coefficient enables higher output in high temperature regions



Excellent performance under low light condition



Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

- China Sunergy Co., Ltd. designs, manufactures and delivers high efficient solar cells and modules to the world from its production centers based in China, Turkey, South Korea and Vietnam.
- Founded in 2004, China Sunergy is well known for its advanced solar cell technology, reliable product quality, and excellent customer service.
- As one of leading PV enterprises, China Sunergy has delivered more than 4.0GW of solar products to residential, commercial, utility and off-grid projects all around the world.

- Note:
All specifications, warranties, certifications about module of "CSUN" series also apply to that of "SST".

All information and data are subject to change without notice.

Right 2017



www.csun-solar.com



All rights reserved @ CSUN

Electrical Characteristics at Standard Test Conditions (STC)

Module Type	CSUN275-60M-BB	CSUN270-60M-BB	CSUN265-60M-BB	CSUN260-60M-BB
Maximum Power-Pmax (W)	275	270	265	260
Open Circuit Voltage - Voc (V)	38.5	38.3	38.2	38.1
Short Circuit Current - Isc (A)	9.13	9.07	8.98	8.90
Maximum Power Voltage - Vmpp (V)	31.3	31.2	31.0	30.8
Maximum Power Current - Impp (A)	8.79	8.65	8.55	8.44
Module Efficiency	16.93%	16.63%	16.32%	16.01%

Standard Test Conditions [STC]: irradiance 1,000 W/m²; AM 1,5G; module temperature 25°C. Measuring uncertainty of power is within ±3%. Tolerance of Pmp:0~+3%. Certified in accordance with IEC61215, IEC61730-1/2 and UL1703.

Electrical Characteristics at Nominal Operating Cell Temperature (NOCT)

Module Type	CSUN275-60M-BB	CSUN270-60M-BB	CSUN265-60M-BB	CSUN260-60M-BB
Maximum Power-Pmax (W)	202	198	195	192
Open Circuit Voltage - Voc (V)	35.5	35.3	35.2	35.1
Short Circuit Current - Isc (A)	7.42	7.36	7.28	7.19
Maximum Power Voltage - Vmpp (V)	29.0	28.8	28.6	28.4
Maximum Power Current - Impp (A)	6.96	6.88	6.82	6.76

Nominal Operating Module Temperature(NOCT): irradiance 800W/m²; wind speed 1m/s; ambient temperature 20°C. Measuring uncertainty of power is within ±3%, Certified in accordance with IEC61215, IEC61730-1/2 and UL1703.

Temperature Characteristics

Voltage Temperature Coefficient	-0.307%/°C
Current Temperature Coefficient	+0.039%/°C
Power Temperature Coefficient	-0.423%/°C
NOCT	45±2°C

Maximum Ratings

Maximum system voltage(V)	1000
Series fuse rating(A)	20

Mechanical Characteristics

Dimensions	1640x990x35(LxWxH)
Weight	18.3kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2mm
Cell Encapsulation	EVA(Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6×10 pieces monocrystalline solar cells series strings (156mm×156mm)
Junction Box	Rated current ≥13A, IP≥ 67, TUV&UL
Cable & Connector	Length 900mm, 1x4mm ² , compatible with MC4


Packaging

Dimensions (L×W×H)	1700×1140×1137mm
Container 20'	360
Container 40'	840
Container 40' HC	896

System Design

Temperature range	-40°C to +85°C
Hail	maximum diameter of 25mm with impact speed of 23m/s
Maximum surfaceload	5400Pa
Application class	class A
Safety class	class II

Dimensions

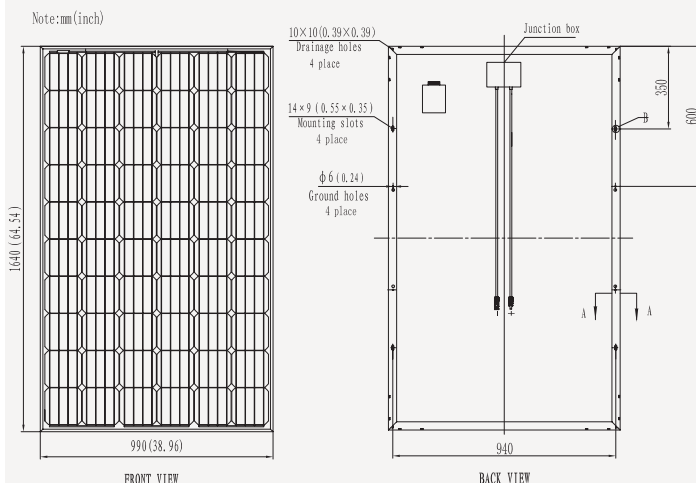

IV-Curves

