



# mit... more confort

Made with flexible polyurethane. MORE RESISTANT, MORE ELASTIC, MORE COMFORTABLE. A product developed from an internal aluminium injected frame in order to become the lightest on the market.



Vertical Stacking. Easy access.

## + precision



1 Trolley = 20 Uds.

40 Uds. = 1 m<sup>2</sup>  
80 Uds. = 2 m<sup>2</sup>  
160 Uds. = 4 m<sup>2</sup>

4 Legged chair with writing tablet



With weight more than 15 kg.  
Without a seated user, the chair overturns.

With a seated user, maximum resistance of writing tablet 40 kg.



Now  
more light  
6,2 Kg.

100%

Recyclable

■ DESCRIPTION

PU integral (polyurethane) **Back and Seat** in different finishes, moulded over internal injected aluminium skeleton. **Seat** has also a spring to provide comfort. Different **Arm** choices: silver aluminium, moulded PU over 20 x 10 mm steel plaque (*check different accessories*). Extruded aluminium **frame** of 28 x 22 x 5 mm. Available in different finishes: **aluminized, black or white**. Polypropylene caps with anti-skid pad the Polyethylene (PE). Black finish. **Optional** writing tablet or compact laminate 13 mm thickness. It is possible to pile chairs. Writing tablet can be fixed right or left hand side.

■ BACK AND SEAT



(see finishes and fabric card)

■ ACCESSORIES



PU arm with steel plaque  
20 x 10 mm thickness



Moulded aluminium arm  
20 x 10 mm thickness



Optional Hook on basket Ø 5 mm thickness with supports Ø 7 mm thickness. **Aluminum finish**



Optional writing tablet, compact laminate 13 mm white and MFC silver 16 mm thickness. It could be fixed to the right or left hand side




- ① PU integral back and seat
- ② Internal skeleton, injected aluminium
- ③ Different arm choices (*check accesories*)
- ④ Aluminium frame seat with springs
- ⑤ Extruded aluminium frame of 28 x 22 x 5 mm in finishes: **aluminium, white or black**
- ⑥ Caps of polypropylene (P.P) with anti-skid pad the Polyethylene (PE). Black finish

■ SIZES


Total height: from 820 mm  
Total width: from 460 mm  
Total depth: from 510 mm

Seat height: from 370 mm  
Seat width: from 360 mm  
Seat depth: from 510 mm

■ SIZES

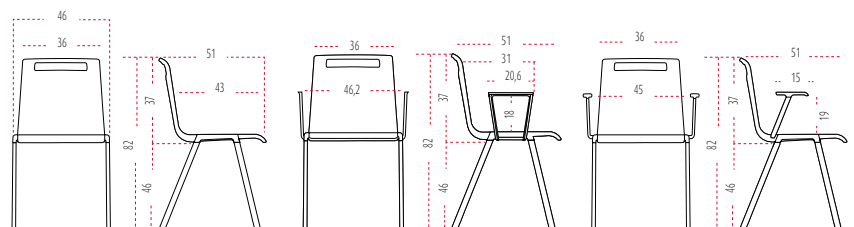

max. 20 chairs

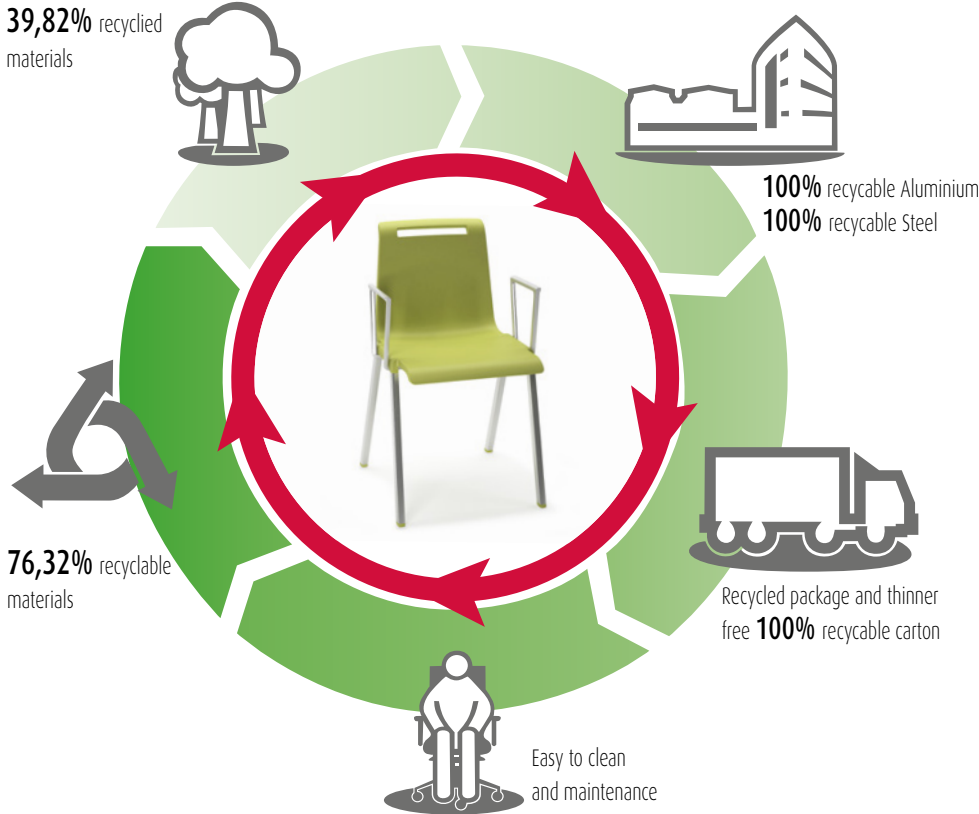

 **MATERIALS**

MIT has been designed to be manufactured with recycled materials 39,82%, danger substances such as chrome, mercury or cadmium are not used in big quantity. Recyclables Aluminium and Steel 100%. Organic volatile Components. Packages manufactured with recycled carton. Ink thinner free.

 **PRODUCTION**

Energy use is optimized during the production process. Minimum environmental impact. Last generation technological system in coating processes. Painting that have not been used is recovered to use it again. Zero COVs emissions and other contaminant gas. Close water circuit to clean the metals. Heat recovery. Automatic manufacture systems. Cut process is planned.

 **TRANSPORT**

Optimum packaging to reduce space in transport and save energy.

 **USE**

Long lasting use. Spare parts and replacements available. Easy to clean and maintenance.

 **DISPOSAL**

76,32% recyclable. Easy and quick to split MIT components. Packages are reuse by our supplier to avoid waste generation. Carton used in packages is recyclable.

**CERTIFICATES AND REFERENCES**

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).

 <p>The mark of responsible forestry</p>	 <p>PEFC Certificate</p>	 <p>EN ISO 14006:2011 ECODESIGN Certificate</p>	 <p>UNE-EN ISO 9001:2008 ISO 9001 Certificate</p>	 <p>UNE-EN ISO 14001:2004 ISO 14001 Certificate</p>	 <p>E1 by EN 13986 Certificate</p>	 <p>ACTIU TECHNOLOGICAL PARK project certified as LEED® GOLD by U.S. Green Building Council 2011 Leadership in Energy &amp; Environmental Design</p>
--	---	--	--	---	---	---

### DESCRIPTION

**PU** integral (polyurethane) **Back and Seat** in different finishes, moulded over internal injected aluminium skeleton. **Seat** has also a spring to provide comfort. Different **Arm** choices: silver aluminium, moulded **PU** over 20 x 10 mm steel plaque (**check different arms**). **Shell support**, moulded aluminium 4 mm thickness with Gas lift. 5 star base, Ø 67,5 cm. Anti-skid castors with soft band.

### BACK AND SEAT



(see finishes and fabric card)

### ARMS



**PU** arm with steel plaque  
20 x 10 mm thickness



Moulded aluminium arm  
20 x 10 mm thickness

### BASES AND CASTORS



Black Polyamide - Ø 67,5 cm  
Black anti-skid castor, Ø 60 mm soft band




Silver aluminium - Ø 67,5 cm  
Dark Grey anti-skid castor, Ø 60 mm black soft band



Polished aluminium base - Ø 67,5 cm  
Black anti-skid castor, Ø 60 mm soft band

### SIZES

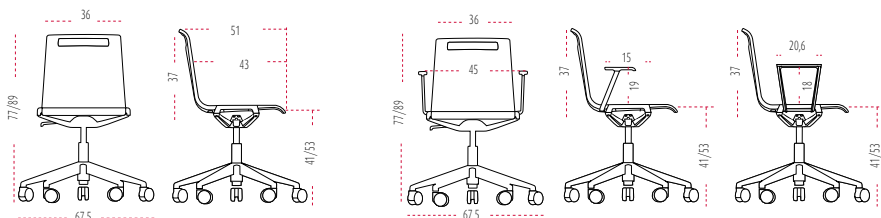


- ① **PU** integral back and seat
- ② Internal skeleton, injected aluminium
- ③ Different arm choices (**check accesories**)
- ④ Aluminium frame seat with springs
- ⑤ Gas lift
- ⑥ Shell support, moulded aluminium
- ⑦ 5 star base, Ø 67,5 cm
- ⑧ Anti-skid castors, soft band, Ø 60 mm

### SIZES

Total height: from 770 mm to 890 mm  
Total width: from 675 mm  
Total depth: from 675 mm

Seat height: from 370 mm  
Seat width: from 360 mm  
Seat depth: from 510 mm

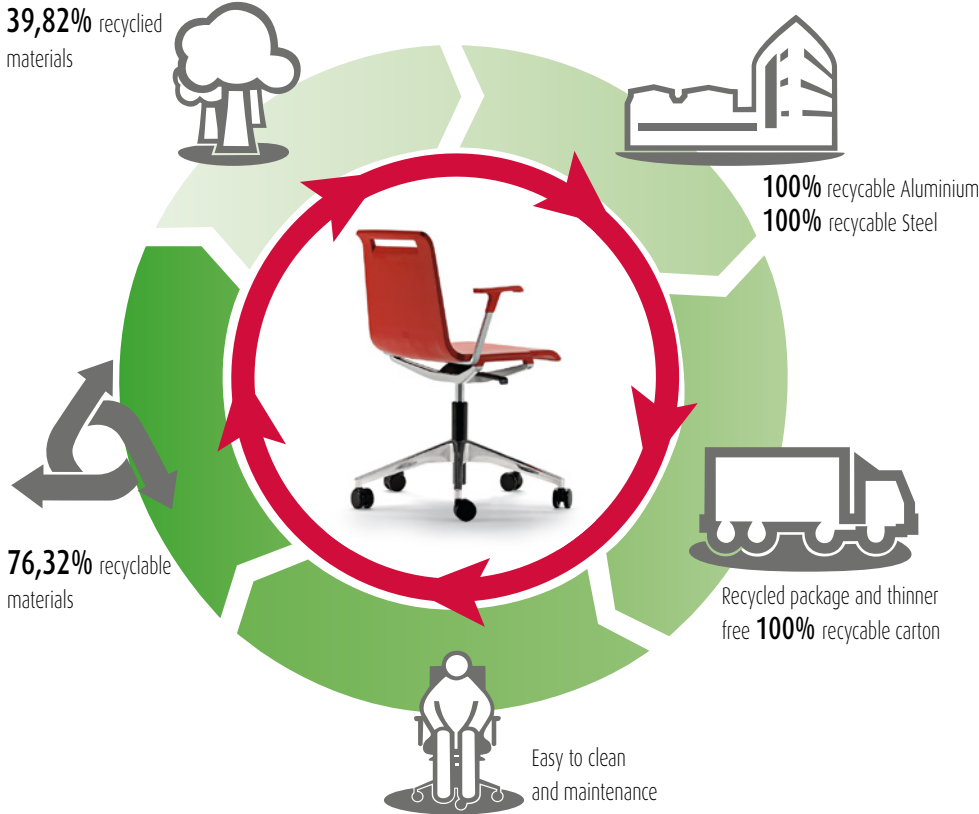

MATERIALS

MIT has been designed to be manufactured with recycled materials 39,82%, danger substances such as chrome, mercury or cadmium are not used in big quantity. Recyclables Aluminium and Steel 100%. Organic volatile Components. Packages manufactured with recycled carton. Ink thinner free.

PRODUCTION

Energy use is optimized during the production process. Minimum environmental impact. Last generation technological system in coating processes. Painting that have not been used is recovered to use it again. Zero COVs emissions and other contaminant gas. Close water circuit to clean the metals. Heat recovery. Automatic manufacture systems. Cut process is planned.

TRANSPORT

Optimum packaging to reduce space in transport and save energy.

USE

Long lasting use. Spare parts and replacements available. Easy to clean and maintenance.

DISPOSAL

76,32% recyclable. Easy and quick to split MIT components. Packages are reuse by our supplier to avoid waste generation. Carton used in packages is recyclable.

CERTIFICATES AND REFERENCES

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).

<p>The mark of responsible forestry</p>	<p>PEFC Certificate</p>	<p>EN ISO 14006:2011 ECODESIGN Certificate</p>	<p>UNE-EN ISO 9001:2008 ISO 9001 Certificate</p>	<p>UNE-EN ISO 14001:2004 ISO 14001 Certificate</p>	<p>E1 by EN 13986 Certificate</p>	<p>ACTIU TECHNOLOGICAL PARK project certified as LEED® GOLD by U.S. Green Building Council 2011 Leadership in Energy &amp; Environmental Design</p>
---	-------------------------	--	--	--	-----------------------------------	---

### DESCRIPTION

**PU** integral (polyurethane) **Back and Seat** in different finishes, moulded over internal injected aluminium skeleton. **Seat** has also a spring to provide comfort. Different **Arm** choices: silver aluminium, moulded **PU** over 20 x 10 mm steel plaque. **(check different Arms)**. Shell **support**, moulded aluminium 4 mm thickness. Swivel **base** polished aluminium Ø 67,5 cm and 5 stars 6 cm thickness. Black glides. Gas lift for height adjustment.

### BACK AND SEAT



(see finishes and fabric card)

### ARMS



**PU** arm with steel plaque  
20 x 10 mm thickness



Moulded aluminium arm  
20 x 10 mm thickness

### BASES




Swivel black polyamide base - 67,5 cm  
Polypropylene (PP) black caps



Swivel polished aluminium base - 67,5 cm  
Polypropylene (PP) black caps

### SIZES

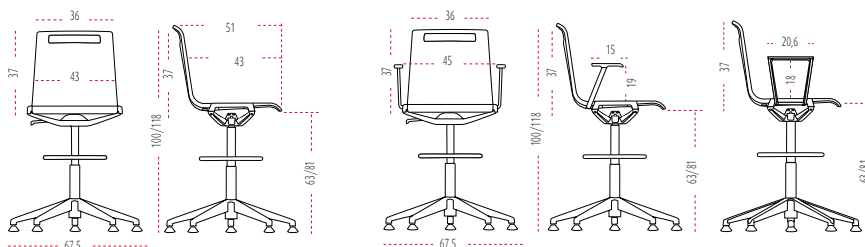


- ① **PU** integral back and seat
- ② Internal skeleton, injected aluminium
- ③ Different arm choices **(check accessories)**
- ④ Aluminium frame seat with springs
- ⑤ Gas lift
- ⑥ Shell support, moulded aluminium
- ⑦ Chromed steel footrest. Curved tube Ø 18 mm, 1,5 mm thickness
- ⑧ Swivel base Ø 67,5 cm 6 mm thickness
- ⑨ Polypropylene (PP) black finish

### SIZES

**Total height:** from 1000 mm to 1180 mm  
**Total width:** from 675 mm  
**Total depth:** from 675 mm

**Seat height:** from 370 mm  
**Seat width:** from 360 mm  
**Seat depth:** from 510 mm

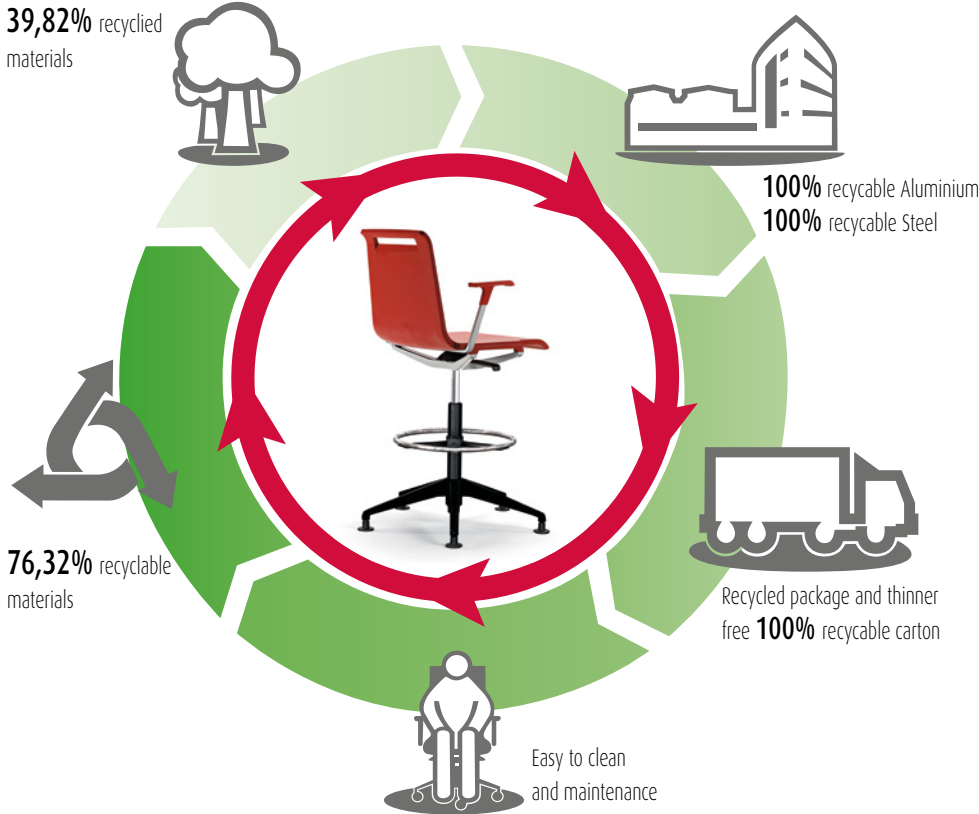

**MATERIALS**

MIT has been designed to be manufactured with recycled materials 39,82%, danger substances such as chrome, mercury or cadmium are not used in big quantity. Recyclables Aluminium and Steel 100%. Organic volatile Components. Packages manufactured with recycled carton. Ink thinner free.

**PRODUCTION**

Energy use is optimized during the production process. Minimum environmental impact. Last generation technological system in coating processes. Painting that have not been used is recovered to use it again. Zero COVs emissions and other contaminant gas. Close water circuit to clean the metals. Heat recovery. Automatic manufacture systems. Cut process is planned.

**TRANSPORT**

Optimum packaging to reduce space in transport and save energy.

**USE**

Long lasting use. Spare parts and replacements available. Easy to clean and maintenance.

**DISPOSAL**

76,32% recyclable. Easy and quick to split MIT components. Packages are reuse by our supplier to avoid waste generation. Carton used in packages is recyclable.

**CERTIFICATES AND REFERENCES**

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).

 <p>The mark of responsible forestry</p>	 <p>PEFC Certificate</p>	 <p>EN ISO 14006:2011 ECODESIGN Certificate</p>	 <p>UNE-EN ISO 9001:2008 ISO 9001 Certificate</p>	 <p>UNE-EN ISO 14001:2004 ISO 14001 Certificate</p>	 <p>E1 by EN 13986 Certificate</p>	 <p>ACTIU TECHNOLOGICAL PARK project certified as LEED® GOLD by U.S. Green Building Council 2011 Leadership in Energy &amp; Environmental Design</p>
--	---	--	--	---	---	---






### DESCRIPTION

- ① **PU integral (polyurethane) Seat** in different finishes, moulded over internal injected aluminium skeleton. Seat has also a spring to provide comfort.
- ② **Frame**, curved shape 25 x 15 mm, 2 mm thickness. Epoxy finish 90 micron. Available in **silver, chromed or white**. Black **anti-skid** polypropylene caps.
- ③ **Chromed footrest**. Curved shape tube 16 mm, 2 mm thickness.
- ④ **Gas lift**
- ⑤a **Swivel base**, Ø 51 cm
- ⑤b **Swivel base**, Ø 39 cm
- ⑥ Black **Anti-skid** polypropylene caps.
- ⑦ Weight control castors, **base 47 cm**

### SIZES

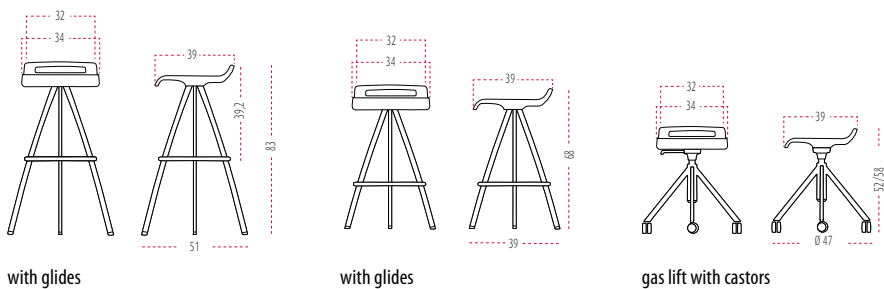


### SIZES

Total height: from 830 mm  
 Total width: from 510 mm  
 Total depth: from 510 mm


Total height: from 680 mm  
 Total width: from 390 mm  
 Total depth: from 390 mm

Total height: from 520 mm to 580 mm  
 Total width: from 470 mm  
 Total depth: from 470 mm

### BACK AND SEAT



(see finishes and fabric card)

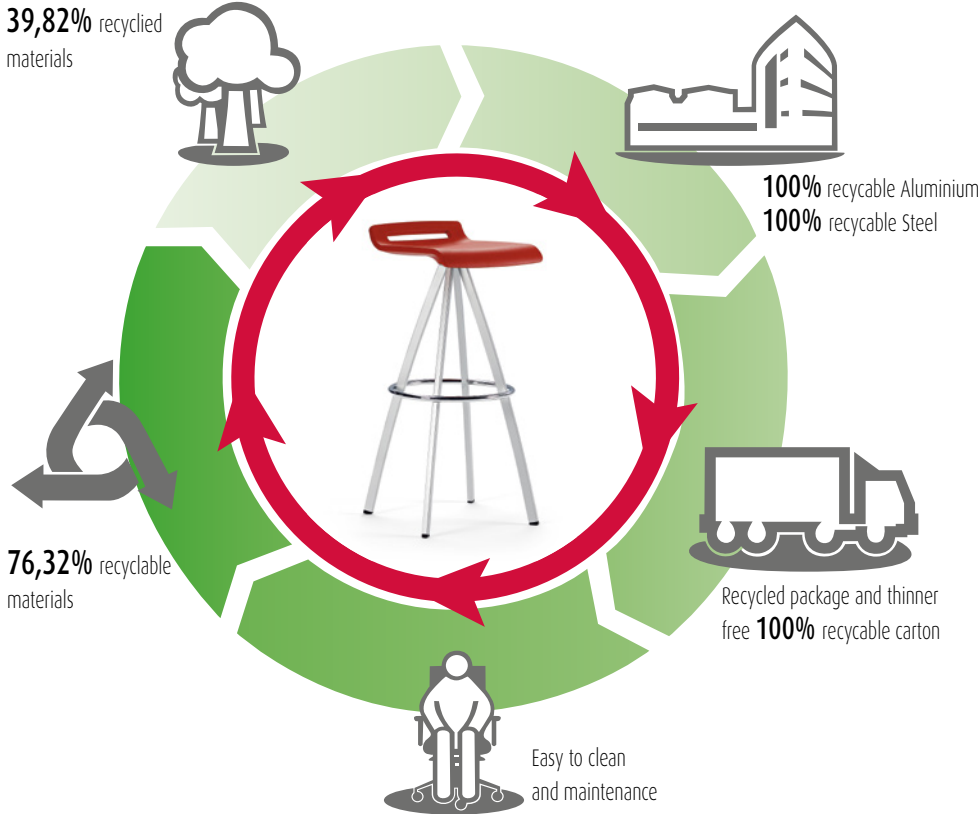

 **MATERIALS**

MIT has been designed to be manufactured with recycled materials 39,82%, danger substances such as chrome, mercury or cadmium are not used in big quantity. Recyclables Aluminium and Steel 100%. Organic volatile Components. Packages manufactured with recycled carton. Ink thinner free.

 **PRODUCTION**

Energy use is optimized during the production process. Minimum environmental impact. Last generation technological system in coating processes. Painting that have not been used is recovered to use it again. Zero COVs emissions and other contaminant gas. Close water circuit to clean the metals. Heat recovery. Automatic manufacture systems. Cut process is planned.

 **TRANSPORT**

Optimum packaging to reduce space in transport and save energy.

 **USE**

Long lasting use. Spare parts and replacements available. Easy to clean and maintenance.

 **DISPOSAL**

76,32% recyclable. Easy and quick to split MIT components. Packages are reuse by our supplier to avoid waste generation. Carton used in packages is recyclable.

**CERTIFICATES AND REFERENCES**

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).


 <p>The mark of responsible forestry</p>	 <p>PEFC Certificate</p>	 <p>EN ISO 14006:2011 ECODESIGN Certificate</p>	 <p>UNE-EN ISO 9001:2008 ISO 9001 Certificate</p>	 <p>UNE-EN ISO 14001:2004 ISO 14001 Certificate</p>	 <p>E1 by EN 13986 Certificate</p>	 <p>ACTIU TECHNOLOGICAL PARK project certified as LEED® GOLD by U.S. Green Building Council 2011 Leadership in Energy &amp; Environmental Design</p>
--	---	--	--	---	---	---



■ DESCRIPTION

- ① PU integral (polyurethane) **Back and Seat** in different finishes, moulded over internal injected aluminium skeleton.
  - a. Back has a flexible point at the top half manufactured by elastic strips.
  - b. Seat has spring placed in the position that supports the user's weight.
- ② Different **Arm** choices: silver aluminium, moulded **PU** over 20 x 10 mm steel plaque (**check different Arm**)
- ③ **Moulded aluminium** support, 4 mm thickness
- ④ Silver steel **Beam** 60 x 40 x 3 mm thickness to link frame to shell. in finished: **aluminium or black**. Aluminium plate to fix the shell to the beam.
- ⑤ Steel **Column** Ø 60 x 2 mm thickness in finished: **aluminium or black**
- ⑥ Moulded aluminium **Feet** 55 cm width, 6 mm thickness in finished: **aluminium or polished**. Levelers **M8** Ø 53 (P.P)+ black Anti-skid pads (**PE**). **Column and feet** epoxy finish 90 micron. Possible to apply anti-bacterial treatment.

■ SIZES

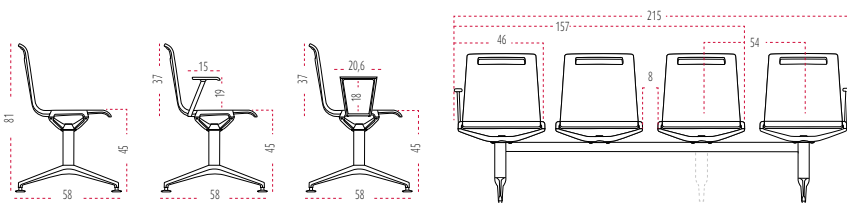

■ SIZES

Total height: from 2150 mm  
 Total width: from 810 mm  
 Seat height: from 450 mm

■ BACK AND SEAT



(see finishes and fabric card)

■ ARMS



PU arm with steel plaque  
20 x 10 mm thickness




Moulded aluminium arm 20 x 10 mm  
thickness


■ BASES



Round shape leg, Steel tube 60 x 2 mm.  
Moulded aluminium leg, 6 mm thickness



Moulded aluminium support, 4 mm  
thickness

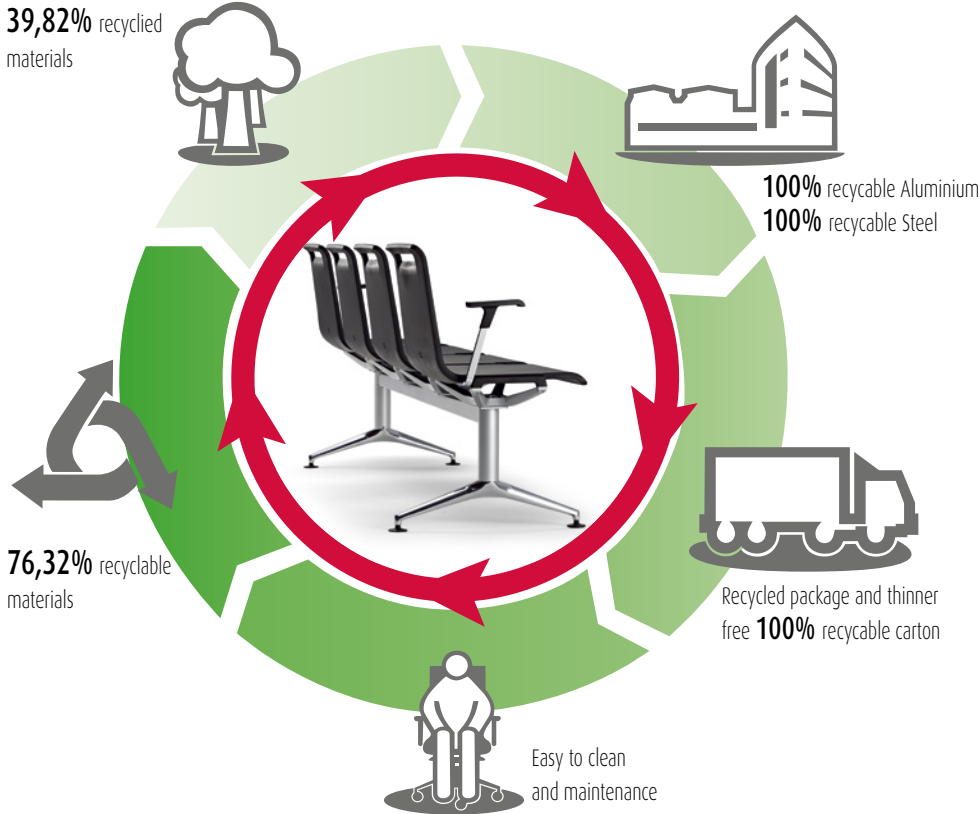

MATERIALS

MIT has been designed to be manufactured with recycled materials 39,82%, danger substances such as chrome, mercury or cadmium are not used in big quantity. Recyclables Aluminium and Steel 100%. Organic volatile Components. Packages manufactured with recycled carton. Ink thinner free.

PRODUCTION

Energy use is optimized during the production process. Minimum environmental impact. Last generation technological system in coating processes. Painting that have not been used is recovered to use it again. Zero COVs emissions and other contaminant gas. Close water circuit to clean the metals. Heat recovery. Automatic manufacture systems. Cut process is planned.

TRANSPORT

Optimum packaging to reduce space in transport and save energy.

USE

Long lasting use. Spare parts and replacements available. Easy to clean and maintenance.

DISPOSAL

76,32% recyclable. Easy and quick to split MIT components. Packages are reuse by our supplier to avoid waste generation. Carton used in packages is recyclable.

CERTIFICATES AND REFERENCES

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).

 The mark of responsible forestry	 PEFC Certificate	 EN ISO 14006:2011 ECODESIGN Certificate	 UNE-EN ISO 9001:2008 ISO 9001 Certificate	 UNE-EN ISO 14001:2004 ISO 14001 Certificate	 E1 by EN 13986 Certificate	 ACTIU TECHNOLOGICAL PARK project certified as LEED® GOLD by U.S. Green Building Council 2011 Leadership in Energy & Environmental Design
--------------------------------------	----------------------	--	--	--	--------------------------------	---

## ■ ERGONOMICS

MIT available for all type of users. Perfect for any need and keep user's posture in a natural way without any manual adjustment.

## ■ STANDARDS

MIT has passed tests done in our technical department as well as the tests done in **AIDIMA** the Technological Institute for furniture. The tests correspond to:

### **Contract seating. Test level n. 2. Standard**

- **UNE-EN 15373:07.** Furniture. Resistance, long lasting, security. Requirements for non domestic use seating.

### **Contract seating.**

- **UNE-EN 1728:2001.** Domestic furniture - Seating - Test methods for the determination of strength and durability.

### **Office furniture - Office work chair.**

- **UNE-EN 1335-1/AC:2003. Part 1:** Dimensions - Determination of dimensions.

- **UNE-EN 1335-2:2009. Part 2:** Safety requirements.

- **UNE-EN 1335-3:2009. Part 3:** Test methods.

## ■ ECOLOGY

### **ENERGY SAVING**

The new technological production system included, reduce the energy resources used to manufacture each component. Materials are very well used to avoid wastes.

### **RECYCLED AND RECYCABLE MATERIALS**

ACTIU environmental policy opts to use recycled materials in those components where functionality and lasting is not a condition. Materials used in MIT such as aluminium, steel or wood are totally recyclable.

**■ REMARKABLE VALUES**

**1-** Electrostatic coat, epoxy bonding 2nd generation. Polymerized 200°C with nano-ceramics and non-grease treatments to improve better covering and provide then better resistance and lasting

**2 -** Coating 90 micras thickness. This covering guarantees the finish and maintenance of metal structures.

**3 -** Integral polyurethane **PU** seat. Compact material and soft centre. Comfort and strength.

Friendly touch and resistant surface. **PU** absorbs the impacts when seating or moving. Long lasting without any special maintenance. High resistance to oil and grease, cracks, tears and heat(minimum 80°). It has all DIN 9835 quality requirements

**4 -** Painting process:

Actiu painting plant has minimum environmental impact against the traditional industry processes.

Treatment is done by polarized coating and compacted with temperature. We get homogeneous and regular application with 98% of painting and the remaining 2% is used to produce other paints. Paints used are COVs free (Volatile Organic Components) which are very dangerous for the environment. All water used in the process is re-used, so we get zero dump. The process is free in heavy metal, phosphate, organic components and **DQD** (Biochemical demand of Oxygen). The program gives us an exact control of thickness, so it provides us with standard thickness (90 micron).